


INSTALLING YOUR *Bath Ball*

Standard Installation

Follow the illustrations on the right. Once installed, activate the Bath Ball by running several gallons of **HOT** water through it. Hot water is required.

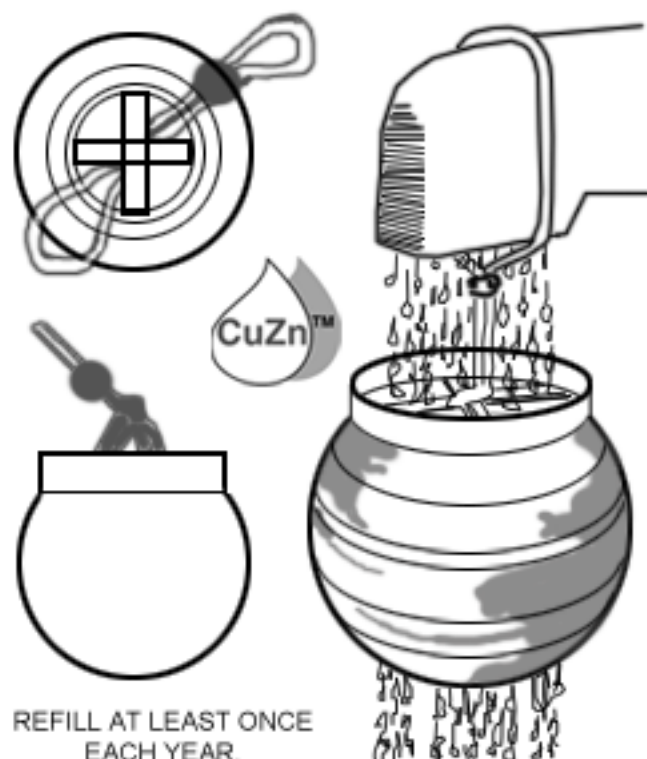

INSTALLING THE BATH BALL

- 1) Slip the open loop over your tub spout and move the bead upward on the loop to tighten.
- 2) position the Bath Ball directly under the spout so that all the water flows through the ball.

TO REPLACE THE HANGER STRAP

- 1) Remove the broken strap, then thread the extra hanger strap through the cross piece on the top of the Bath Ball. You will probably need a paperclip or stiff wire to hook the strap out.
- 2) Slip the strap through itself to secure it to the Bath Ball and form an open loop above the bead

REFILL AT LEAST ONCE
EACH YEAR.
CONTACT YOUR
DISTRIBUTOR.

It is best if the Bath Ball stays wet when not in use. Do not shake water from the Bath Ball after finishing bath.

Unique Installations


Some tub spouts are not designed for hanging accessories. A bit of ingenuity may be required.

For example, you may have to wind the loop around the spout more than once for some types of spouts.

A spout which curves downward too sharply may require that you use the spare loop in addition to the loop already installed on the Bath Ball (A)

The spare loop (or a rubber band) can be used to provide a place to suspend the Bath Ball from the spout. (B)

In some cases, Velcro tabs might be required to fix the Bath Ball in the correct position. (C)
Self-adhesive Velcro is available at most hardware stores.

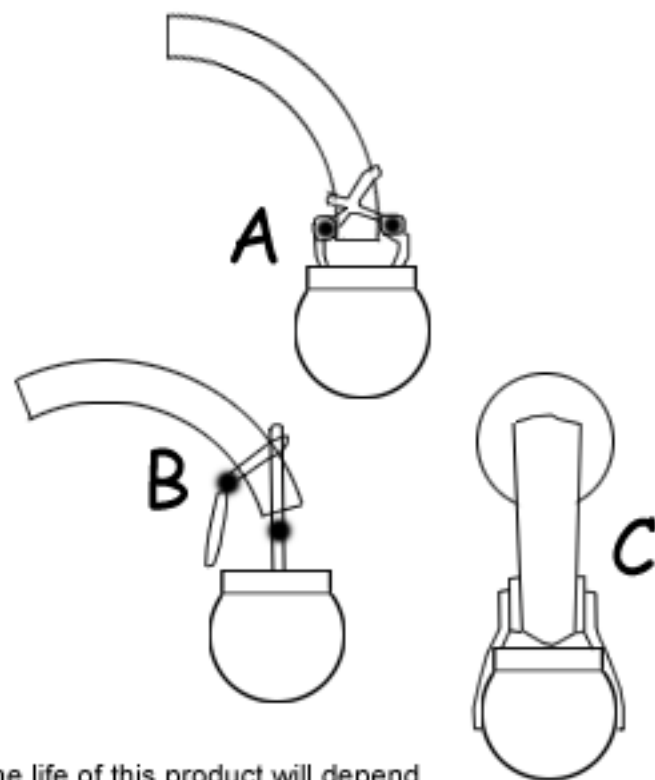

Questions?
Call 1-800-345-7873

The life of this product will depend greatly on the quality of your water. Heavily chlorinated water may shorten its life.